

Stylish_{where innovation meets creativity}


NEW COLOR - BLACK



White FTXA-AW



Silver FTXA-BS



Black FTXA-BB



Blackwood FTXA-BT

Available in 4 colours

- › Users can choose from **four distinct colours** (white, silver, black and blackwood)
- › **Curved corners** create an unobtrusive and space-saving design
- › **Thin dimensions** make it the most compact design unit on the market
- › Simple panel enables variation in texture and colour to easily blend into any room
- › Award winning design: Stylish earned the Reddot award, the Good Design Award and iF award for its innovative look and functional capabilities



reddot award 2018
winner





GOOD DESIGN
AWARD 2017

The Coanda effect

Already present in the Ururu Sarara, the **Coanda effect** optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room.

The Coanda effect creates two different airflow patterns depending on whether Stylish is in cooling or heating mode. On the top is the Coanda effect in cooling mode (ceiling airflow), while the bottom images demonstrate the Coanda effect in heating mode (vertical airflow).

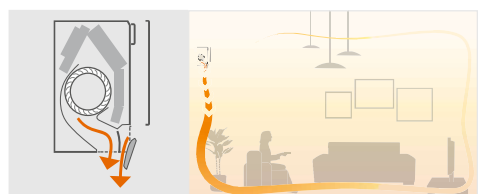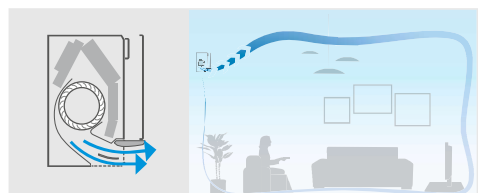




The intelligent thermal sensor measures the surface temperature of a room by dividing it into a grid with 64 different squares.

Intelligent thermal sensor

Stylish uses an **intelligent thermal sensor** to detect the surface temperature of a room to create a more comfortable climate.

After determining the current room temperature, the grid eye sensor distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it.

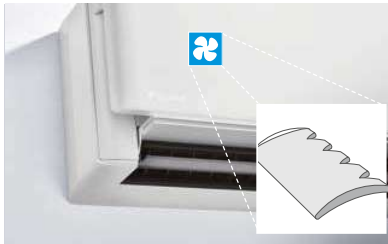

Sound dispersion and noise reduction are the results of a special fan design.

Quiet operation

Stylish uses a **specially designed fan** to optimise airflow for higher energy efficiency at low sound levels.

To achieve higher energy efficiency, Daikin designed a fan that runs efficiently within Stylish's compact dimensions. Together, the fan and heat exchanger attain top energy performance but operate at a sound level that is practically inaudible to occupants.



Daikin Online Controller

You can also manage Stylish using your smartphone. Simply connect to Wi-Fi and download the Daikin Online Controller app to begin creating your perfect climate.

Your benefits

- > Access several features to control your climate
- > Manage the temperature, operating mode, air purification and fans with interactive thermostat
- > Create different schedules and operation modes
- > Monitor energy consumption
- > Compatible with the If This Then That (IFTTT) app

Wall mounted unit

Most compact design wall mounted unit

- > A compact and functional design suitable for all interiors in a white, black, silver and blackwood coloured elegant finish
- > The Coanda effect optimises the airflow for a comfortable climate. By using specially designed flaps, a more focused airflow allows a better temperature distribution throughout the whole room
- > The intelligent thermal sensor determines the current room temperature and distributes air evenly throughout the room before switching to an airflow pattern that directs warm or cool air to areas that need it
- > Online controller: control your indoor from any location with an app, via your local network or internet
- > Powerful air purification increases indoor air quality with Daikin Flash Streamer technology
- > Practically inaudible: the unit runs so quietly, you will almost forget it is there.
- > Choosing for an R-32 product, reduces the environmental impact with 68% compared to R-410A and leads directly to lower energy consumption thanks to its high energy efficiency
- > Seasonal efficiency values up to A+++ in cooling and heating

STANDARD INCLUDED



GOOD DESIGN



DESIGN AWARD 2018



reddot award 2018 winner

Efficiency data	FTXA + RXA		CTXA15 AW/BS/BT/BB	20AW/BS/BT/BB	25AW/BS/BT/BB	35AW/BS/BT/BB	42AW/BS/BT/BB	50AW/BS/BT/BB	
	Min./Nom./Max.	Max.		+ 20A	+ 25A	+ 35A	+ 42B	+ 50B	
Cooling capacity	Min./Nom./Max.		Connectable to multi outdoor units only	1.3/2.0/2.6	1.3/2.5/3.2	1.4/3.4/4.0	1.7/4.2/5.0	1.7/5.0/5.3	
Heating capacity	Min./Nom./Max.			1.30/2.50/3.50	1.30/2.80/4.70	1.40/4.00/5.20	1.70/5.40/6.00	1.70/5.80/6.50	
Power input	Cooling	Min./Nom./Max.		0.27/0.43/0.63	0.27/0.56/0.78	0.31/0.78/1.04	-/1.05/-	-/1.36/-	
	Heating	Min./Nom./Max.		0.25/0.50/0.91	0.25/0.56/1.22	0.26/0.99/1.67	-/1.31/-	-/1.45/-	
Space cooling	Energy efficiency class				A+++			A++	
	Capacity	Pdesign		kW	2.00	2.50	3.40	4.20	5.00
	SEER				8.75	8.74	8.73	7.50	7.33
Space heating (Average climate)	Annual energy consumption			kWh/a	80	101	137	196	239
	Energy efficiency class					A+++			A++
	Capacity	Pdesign		kW	2.40	2.45	2.50	3.80	4.00
Nominal efficiency	SCOP/A				5.15			4.60	
	Annual energy consumption		kWh/a	653	666	680	1150	1,217	
	EER			4.70	4.46	4.37	3.99	3.68	
	COP			5.00	4.04	4.12	4.00		
	Energy labeling Directive	Cooling/Heating			A/A				

Indoor unit	FTXA		CTXA15 AW/BS/BT/BB	20AW/BS/BT/BB	25AW/BS/BT/BB	35AW/BS/BT/BB	42AW/BS/BT/BB	50AW/BS/BT/BB		
	Unit	HeightxWidthxDepth		mm	mm	mm	mm	mm		
Dimensions	Unit	HeightxWidthxDepth	mm	295x798x189						
Weight	Unit		kg	12						
Air filter	Type			Removable / washable						
Fan	Air flow rate	Cooling	Silent operation/ Low/Medium/High	m³/min	4.6 / 6.1 / 8.2 / 11.0	4.6/6.1/8 / 11.0	4.6/6.1/9 / 11.5	4.6/6.1/9 / 11.9	4.6/7.2/10 / 13.1	5.2/7.6/10 / 13.5
		Heating	Silent operation/ Low/Medium/High	m³/min	4.5/6.4/8.7 / 10.9	4.5/6.4/9.0 / 11.1	4.5/6.4/9.0 / 11.5	5.2/7.7/10.5 / 14.6	5.7/8.2/11.1 / 15.1	
Sound power level	Cooling		dBA	57						
Sound pressure level	Cooling	Silent operation/Low/High	dBA	19/25/39	19/25/40	19/25/41	21/29/45	24/31/46		
	Heating	Silent operation/Low/High	dBA	19/25/39	19/25/40	19/25/41	21/29/45	24/31/46 24/33/46		
Control systems	Infrared remote control			ARC466A58						
	Wired remote control			BRC073						
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240						

Outdoor unit	RXA		Connectable to multi outdoor units only	20A	25A	35A	42B	50B
	Unit	HeightxWidthxDepth		mm	mm	mm	mm	mm
Dimensions	Unit	HeightxWidthxDepth	mm	550x765x285				734x870x373
Weight	Unit		kg	32				50
Sound power level	Cooling		dBA	59		61		62.0
	Heating		dBA	59		61		62.0
Sound pressure level	Cooling	Nom.	dBA	46		49		48.0
	Heating	Nom.	dBA	47		49		48.0
Operation range	Cooling	Ambient Min.~Max.	°CDB					-10~46
	Heating	Ambient Min.~Max.	°CWB					-15~18
Refrigerant	Type							R-32
	GWP							675.0
Piping connections	Charge		kg/TCO2Eq	0.76/0.52				1.10/0.75
	Liquid	OD	mm	6.35				6.4
	Gas	OD	mm	9.50				12.7
	Piping length OU - IU	Max.	m	20				30
Additional refrigerant charge			kg/m	0.02 (for piping length exceeding 10m)				
	Level difference IU - OU	Max.	m	15.0				20
Power supply	Phase/Frequency/Voltage		Hz/V	1~/50/220-240				
Current - 50Hz	Maximum fuse amps (MFA)		A	10				13

