

The best of the best



Why choose Ururu Sarara?

The Daikin Ururu Sarara brings a new level of sophisticated control to air conditioning. It has five air treatment techniques which together provide a total comfort solution. In addition, the Ururu Sarara range has SEER and SCOP A+++ ratings thanks to its energy efficient compressor and heat exchanger. Because of its innovative technology, as well as its design, it won the prestigious Red Dot design award in 2013.

5 air treatment techniques


- › Heating and cooling in one unit, for year-round comfort with the highest energy label available
- › In winter, the Ururu function replenishes the moisture in the air to maintain a comfortable feel without unnecessary heating
- › In summer, the Sarara function removes excess moisture while maintaining an even temperature thus eliminating the need for extra cooling
- › Ventilation for fresh air even with closed windows
- › Air purification and automatic filter cleaning to remove allergens, bacteria and viruses to supply clean air




reddot design award
winner 2013



BLUEEVOLUTION

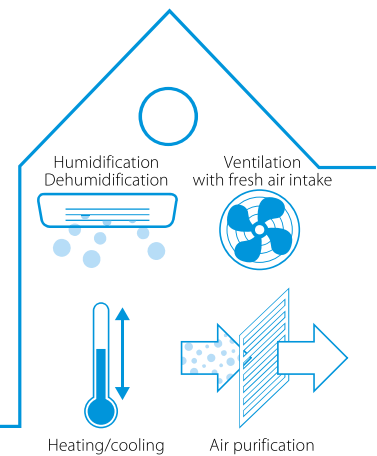

Flash Streamer: releases streams of high-speed electrons with strong oxidation power
Pre-filter: catches dust

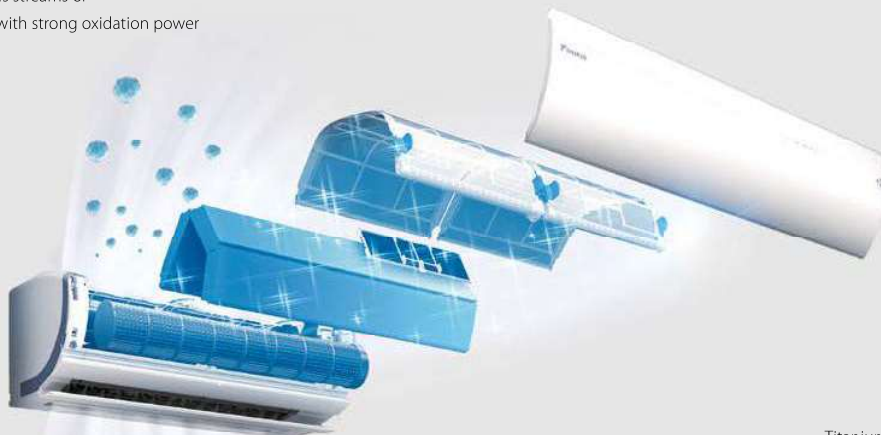

Titanium apatite deodorising filter: captures allergens, bacteria & viruses and deodorizes smells of for example tobacco and pets

Wall mounted unit

Complete climate control with (de) humidification, air purification & ventilation with top efficiencies in heating & cooling

- › Unique combination of humidification, dehumidification, ventilation, air purification and heating & cooling in 1 system
- › 3 area motion detection sensor: air flow is sent to a zone other than where the person is located at that moment. Detection is done in 3 directions: left, front and right. If no people are detected, the unit will automatically switch over to the energy-efficient
- › Online controller (optional): control your indoor from any location with an app, via your local network or internet and keep an overview on your energy consumption
- › No need to clean filters, thanks to the self cleaning filter
- › Seasonal efficiency values: full range A+++ in cooling and heating
- › Whisper quiet in operation: the operating of the unit can hardly be heard. The sound pressure level goes down to 19dBA!
- › 3-D air flow combines vertical and horizontal auto swing to circulate a stream of warm or cool air right to the corners of even large spaces
- › Reddot design award winner 2013



Efficiency data				FTXZ + RXZ	25N + 25N	35N + 35N	50N + 50N
Cooling capacity	Min./Nom./Max.		kW		0.6/2.5/3.9	0.6/3.5/5.3	0.6/5.0/5.8
Heating capacity	Min./Nom./Max.		kW		0.6/3.6/7.5	0.6/5.0/9.0	0.6/6.3/9.4
Power input	Cooling	Min./Nom./Max.	kW		0.11/0.41/0.88	0.11/0.66/1.33	0.11/1.10/1.60
	Heating	Min./Nom./Max.	kW		0.10/0.62/2.01	0.10/1.00/2.53	0.10/1.41/2.64
Space cooling	Energy efficiency class					A+++	
	Capacity	Pdesign	kW		2.50	3.50	5.00
	SEER				9.54	9.00	8.60
	Annual energy consumption		kWh/a		92	136	203
Space heating (Average climate)	Energy efficiency class					A+++	
	Capacity	Pdesign	kW		3.50	4.50	5.60
	SCOP/A				5.90	5.73	5.50
	Annual energy consumption		kWh/a		831	1,100	1,427
Nominal efficiency	EER				6.10	5.30	4.55
	COP				5.80	5.00	4.47
	Annual energy consumption			kWh	205	330	550
	Energy labeling Directive Cooling/Heating					A/A	
Indoor unit				FTXZ	25N	35N	50N
Dimensions	Unit	HeightxWidthxDepth		mm	295x798x372		
Weight	Unit			kg	15		
Air filter	Type				Auto cleaning filter		
Fan	Air flow rate	Cooling	Silent operation/Low/High	m ³ /min	4.0/5.3/10.7	4.0/5.6/12.1	4.6/6.6/15.0
		Heating	Silent operation/Low/High	m ³ /min	4.8/6.7/11.7	4.8/6.9/13.3	5.9/7.7/14.4
Sound power level	Cooling			dBA	54	57	60
	Heating			dBA	56	57	59
Sound pressure level	Cooling	Silent operation/Low/Nom./High		dBA	19/26/33/38	19/27/35/42	23/30/38/47
	Heating	Silent operation/Low/Nom./High		dBA	19/28/35/39	19/29/36/42	24/31/38/44
Control systems	Infrared remote control				ARC477A1		
	Wired remote control				-		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		
Outdoor unit				RXZ	25N	35N	50N
Dimensions	Unit	HeightxWidthxDepth		mm	693x795x300		
Weight	Unit			kg	50		
Sound power level	Cooling			dBA	59	61	63
	Heating			dBA	59	61	64
Sound pressure level	Cooling	High		dBA	46	48	49
	Heating	High		dBA	46	48	50
Operation range	Cooling	Ambient	Min.~Max.	°CDB	-10~43		
	Heating	Ambient	Min.~Max.	°CWB	-20~18		
Refrigerant	Type				R-32		
	GWP				675		
	Charge			kg/TCO ₂ Eq	1.34/0.9		
Piping connections	Liquid	OD		mm	6.35		
	Gas	OD		mm	9.5		
	Piping length	OU - IU	Max.	m	10		
	Level difference	IU - OU	Max.	m	8		
Power supply	Phase/Frequency/Voltage			Hz/V	1~/50/220-240		
Current - 50Hz	Maximum fuse amps (MFA)			A	16		